


MINI SQUARE BEACON

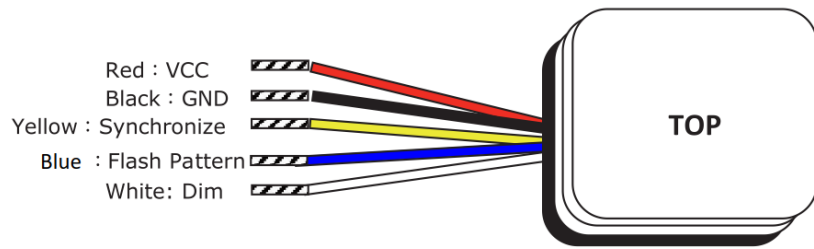

OPERATION

Connect the RED to +VDC

Connect the BLACK to chassis ground.

Connect the Blue wire to Black to chassis pattern change.

Connect the YELLOW wire of all heads together for synchronization

Connect the white to Red for dimming.

Release white will back to full light intensity.

FLASH PATTERN

To select flash pattern, apply BLUE to BLACK wire:

- less than 1 second for next pattern
- more than 1 second for previous pattern
- more than 5 seconds for turn off

Pattern	Mode	Default
P1	ECE R65 Rotator Flash	●
P2	ECE R65 Single Flash	
P3	ECE R65 Double Flash	
P4	ECE R65 Quad Flash	
P5	SAE Rotator Flash	
P6	SAE Single Flash	
P7	SAE Double Flash	
P8	SAE Quad Flash	
P9	Off	